# CES CENTER-TAPPED POWER TRANSFORMERS

Primary Input Voltage 117vac

Output Voltage 12VCT, 24VCT and 48VCT

Solder Lug/Push-on Terminals

Class A Rated @ 105°C Insulated

1,000 Volt Hi-Pot Tested




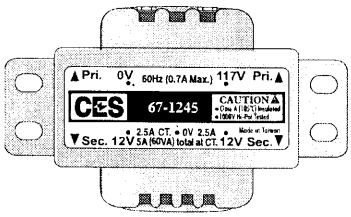




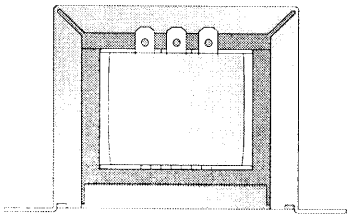

## SPECIFICATIONS

| Part Number | Rated Output Voltage* | Current Rating | Frame Size | Mounting Hole Center to Center | Overall Thickness/Width (Inches) (Excluding Mounting Tabs) | Height |
|---|---|---|---|---|---|---|
| 67-1120 | 12vac | 500ma | EI-41x14.5 | 2.07" | 1.29 x 1.69 | 1.41" |
| 67-1121 | 12vac | 1 amp | EI-41x16.5 | 2.07" | 1.37 x 1.69 | 1.41" |
| 67-1122 | 12vac | 2 amp | EI-48x20B | 2.36" | 1.57 x 1.96 | 1.67" |
| 67-1123 | 12vac | 3 amp | EI-57x19A | 2.79" | 1.73 x 2.32 | 2.0" |
| 67-1124 | 12vac | 4 amp | EI-57x25B | 2.79" | 1.95 x 2.32 | 2.0" |
| 67-1125 | 12vac | 5 amp | EI-66x25B | 3.14" | 2.12 x 2.67 | 2.28" |
| 67-1240 | 24vac | 500ma | EI-41x16.5 | 2.07" | 1.37 x 1.69 | 1.41" |
| 67-1241 | 24vac | 1 amp | EI-48x20B | 2.36" | 1.57 x 1.96 | 1.67" |
| 67-1242 | 24vac | 2 amp | EI-57x25B | 2.79" | 1.95 x 2.32 | 2.0" |
| 67-1243 | 24vac | 3 amp | EI-66x30 | 3.14" | 2.29 x 2.67 | 2.28" |
| 67-1244 | 24vac | 4 amp | EI-76x30 | 3.62" | 2.42 x 3.1 | 2.65" |
| 67-1245 | 24vac | 5 amp | EI-76x35A | 3.62" x 2 rows in 0.72" pitch | 2.64 x 3.1 | 2.65" |
| 67-1483 | 48vac | 3 amp | EI-76x40B | 3.62" x 2 rows in 0.72" pitch | 2.84 x 3.1 | 2.65" |

sformers2.qxd